

Compact isolator for indoor use

Conform IEC 62271-102


EME type MI-UI-HEAVY

*U_r: 3,6 - 36 kV

*I_r: 400 - 2500 A

*I_k: 12,5 - 50 kA/1s

* Other values available on demand!

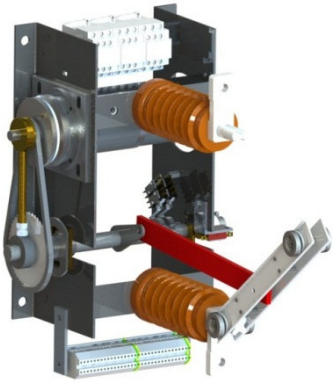

MI-UI-HEAVY 17,5kV 630A


MAIN FEATURES

The one pole disconnecter MI-UI-Heavy has following features:

- Disconnecter with 2 positions: Closed - open
- Mechanical endurance class M0; 1000 C-O (close-open cycles)
- Standard motor drive type H mounted on switch with control system standard included and mounted on the disconnecter.
- Motor drive has an electromagnetic clutch which allows normal manual operation with removable lever on the main shaft of the switch
- On demand : mounting of switch possible in each position
- On demand : manual operating lever

ACCESSORIES (See also BR080 for more information)

- Beside standard execution, other types of auxiliary contacts available:
 - Heavy DC-currents
 - Very low currents (e.g. PLC-applications)
 - Positively driven contacts (IEC 60947-5-1)
 - IP67 execution
- Electro-mechanical interlock (100% ED) standard in several supply voltages:
 - 24, 110-125, 205-220 VDC
 - 230 VAC
 - Standard execution = interlocking without voltage supply
- 4 supply voltages available:
 - 48, 110 VDC
 - 110, 230 VAC
- Key or padlock interlock
- Insulators with higher creepage distance

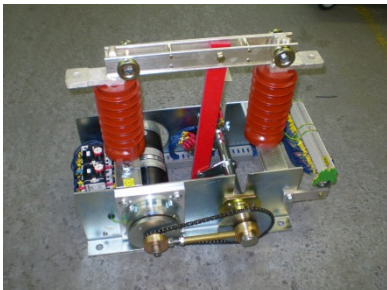

MI-UI-HEAVY 17,5kV 630A



Electro Mechanic Equipment nv-sa
Zuurbemde 51
3380 Glabbeek (Belgium)

www.eme.be thv@eme.be

+32 (0)16 77 23 00 +32 (0)16 77 89 03
BTW-VAT-TVA : BE 0415.742.790