

Compact isolator for indoor use

Conform IEC 62271-102


EME type MI-UI-LSL

*U_r: 3,6 - 36 kV


*I_r: 400 - 2500 A

*I_k: 12,5 - 50 kA/1s

* Other values available on demand!

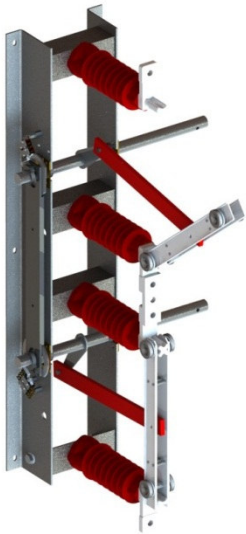

MI-UI-LSL 24kV 630A

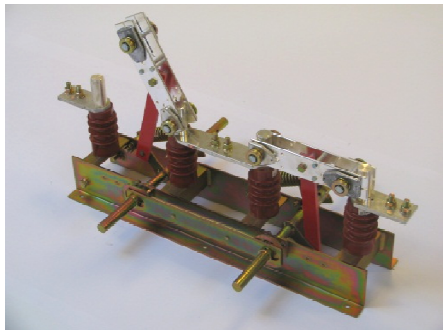

MI-UI-LSL 12kV 1250A

MAIN FEATURES

The double one pole disconnecter MI-UI-LSL has following features:

- 2 disconnectors with 2 positions: Closed – open
- 2 disconnectors mounted on 1 frame, the one above the other as an inverter-switch
- Mechanical interlock between the 2 disconnectors (never both main contacts open or closed)
- Mechanical endurance class M0; 1000 C-O (close-open cycles)
- On demand : mounting of switch possible in each position

ACCESSORIES (See also BR080 for more information)

- Beside standard execution, other types of auxiliary contacts available:
 - Heavy DC-currents
 - Very low currents (e.g. PLC-applications)
 - Positively driven contacts (IEC 60947-5-1)
 - IP67 execution
- Electro-mechanical interlock (100% ED) standard in several supply voltages:
 - 24, 110-125, 205-220 VDC
 - 230 VAC
 - Standard execution = interlocking without voltage supply
- Standard motor drives available, type D, L (see BR924) in several supply voltages:
 - 24, 110, 125, 220 VDC
 - 230, 3x400 VAC
 - Control system standard included and mounted on the disconnecter
 - Manual emergency lever included
- Shaft extensions and removable operating levers for manual disconnectors
- Key or padlock interlock
- Insulators with higher creepage distance



Electro Mechanic Equipment nv-sa
Zuurbemde 51
3380 Glabbeek (Belgium)

www.eme.be thv@eme.be

☎ +32 (0)16 77 23 00 📠 +32 (0)16 77 89 03
BTW-VAT-TVA : BE 0415.742.790